


# BOS 200® Case Study – Outpost Truck Stop Site

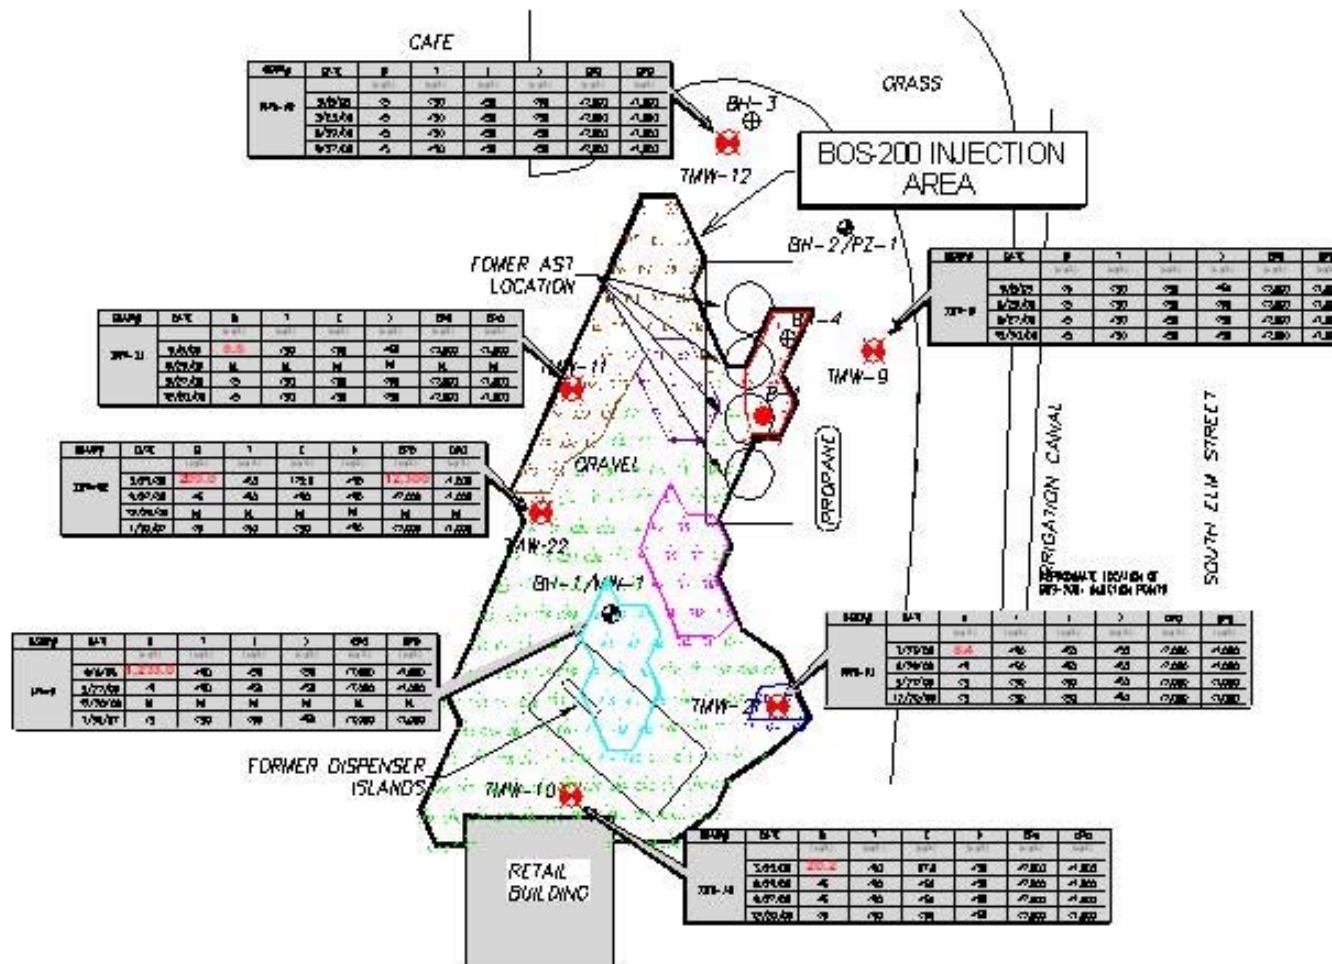

## Contamination Load

Bz – low - 1,200 µg/L  
 TPH – gw – low to 18,000 µg/L, soil – up to 7,900 mg/Kg

## BOS-200 Injection

Injec. Borings - 205  
 BOS-200® - 25,600 lbs  
 Sulfate - 6,250 lbs  
 Injec. Area - 25,000 ft<sup>2</sup>  
 Cost - \$250,000

## Site Status

Attempting to Close

