


BOS 200® Case Study – C-Plus Site

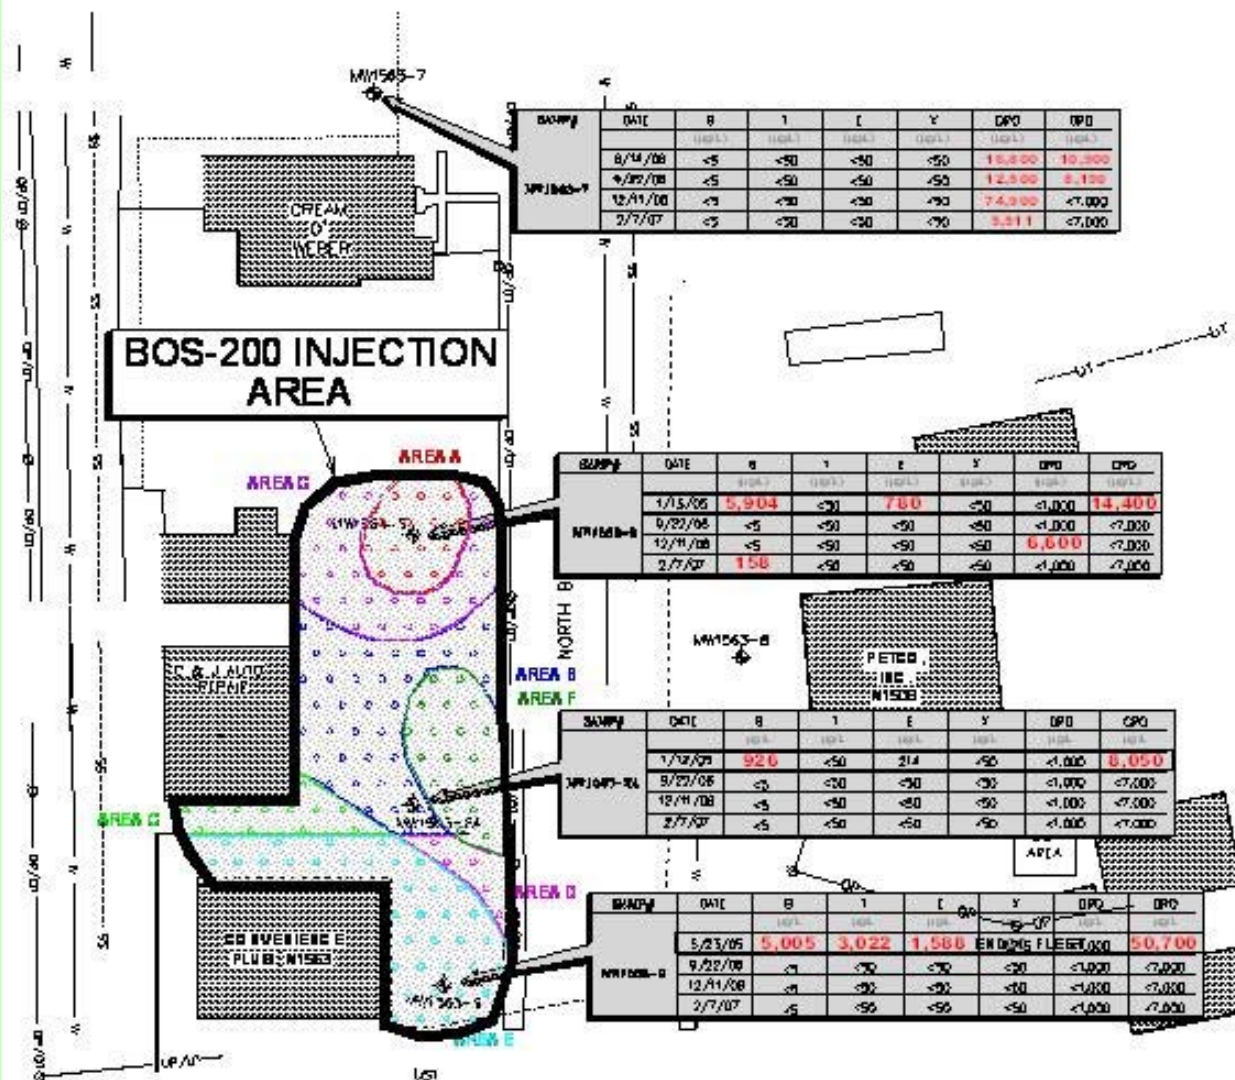

Contamination Load

Bz – up to 26,000 µg/L

TPH – gw up to 14,400 µg/L

BOS-200 Injection

Injec. Borings - 109

BOS-200® - 18,500 lbs

Sulfate - 9,600 lbs

Injec. Area – 3,700 ft²

Costs – \$130,000

Site Status

MNA – Eval MW-7

